


Antistatic Wires

Prevent sparks from static electricity generated by movement and flow of flammable liquids

- During waste collection operations, use one antistatic wire to bond from a safety container to a receiving vessel such as a funnel, then properly ground by attaching a second antistatic wire to the drum and then to an earth ground
- Standard wire lengths are 3-foot (1-m) and 10-foot (3-m); for longer reach, use several wires with 0.25-in (6-mm) terminal ends
- Custom length assemblies available in 3-foot (1-m) increments

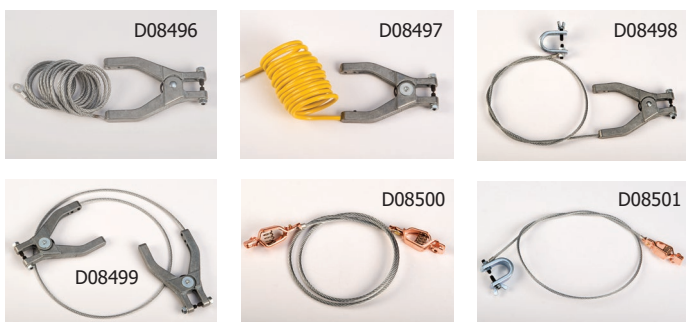

Bond dispensing can to receiving container, then ground receiving container to a water pipe or ground strip.

| Description | End Connections | Model |
|---|--|--------|
| Flexible wire, 10 foot (3 meters) coiled | Hand clamp + 0.25 in (6 mm) terminal | D08496 |
| Insulated wire, 10 foot (3 meters) coiled | Hand clamp + 0.25 in (6 mm) terminal | D08497 |
| Flexible wire, 3 foot (1 meter) | "C" clamp 0.625 in (16 mm) + hand clamp | D08498 |
| | Dual hand clamps | D08499 |
| | Dual alligator clips 0.625 in (16 mm) jaws | D08500 |
| | "C" clamp 0.625 in (16 mm) + alligator clip 0.625 in (16 mm) | D08501 |
| Insulated Wire, 3 foot (1 meter) | Dual 0.25 in (6 mm) terminals. Also used as an extension | D08503 |
| | "C" clamp 0.625 in (16 mm) + alligator clip 0.625 in (16 mm) | D08505 |
| | Dual 0.25 in (6 mm) terminals. Also used as an extension | D08506 |

For custom assemblies, call Customer Service.



Drum Fill Gauges

Avoid overfilling and dangerous overflow – polyethylene pop-up gauge provides an economical way to prevent accidents

- Polyethylene gauges for use with vertically-stored drums during waste disposal operations
- Zinc-plated, cast-iron gauge for horizontally-stored drums permits visual checking of liquid level. Heavy-duty glass tubing protected by a chrome-plated housing for use with non-viscous liquids. Buna-N seals are suitable for petroleum products.



D08532



D08530

| Description | Dimensions | NPT/NPS | Model |
|---|------------------------------------|----------------|---------|
| Vertical drum polyethylene pop-up gauge | 0.75 in dia. - 5 in L (127 mm) | 0.75 in (DN20) | D08530 |
| Vertical drum polyethylene pop-up gauge | 0.75 in dia. - 11 in L (279 mm) | | D08531 |
| Horizontal drum cast-iron fill gauge | 0.75 in dia. - 11.25 in L (286 mm) | | D08532* |
| Horizontal drum cast-iron fill gauge D08532 with self-closing faucet No. D08902 | | | D08533 |

* Can be used with drum siphon adapter D08311 or D08308.