


LOAD TRANSFER STATIONS LTSC SPECIFICATIONS

Load Transfer Stations are capable of transferring products that are packaged in cases, barrels, drums, bags and pails from one pallet to another including Plastic, Chep and GMA pallets in both receiving and shipping applications. Make your next load transfer an easy one with the LTSC model that features an additional Pallet Cart.

The Load Transfer Station with Pallet Cart (LTSC) is made up of a standard LTS and the addition of a pallet cart. The forklift driver places the pallet load onto the receiving deck and pulls the overhead pull cord to activate the transfer process, allowing the transfer to complete automatically. The transfer cycle is completed with one 30 second cycle, then the unit extends and is ready for the next transfer with a total transfer cycle time of less than 60 seconds. This may be modified by the speed and efficiency of the forklift operators.

Since the LTSC hydraulic and electrical components are self contained, it can be positioned anywhere that can be reached with a 230 or 460 volt power supply. The LTSC can be loaded from either side and unloaded from three sides, allowing for the use of four-way pallets.

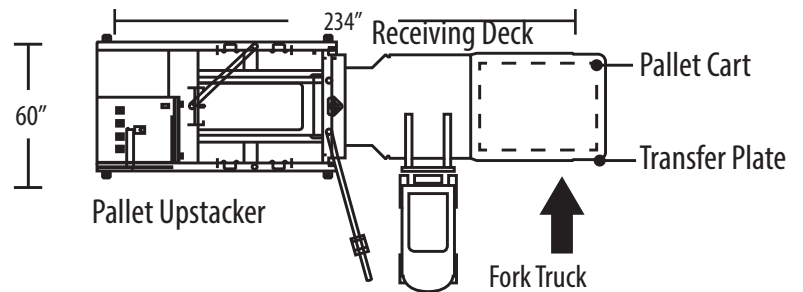

BENEFITS

- Eliminate injury to warehouse personnel
- Streamline plant and warehouse operations
- Less wear and tear of lift trucks
- Improve plant process cleanliness
- Reduce shipping costs
- Easy-to-operate (ETO)

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling PTY LTD Working with ease.

FEATURES

- Automatic pallet upstack holds up to 20 pallets
- Hydraulically actuated
- Heavy-duty construction
- Easy to operate
- 5 HP integral hydraulic power unit
- Weighs 3175 kg
- 1600 kg load capacity
- 3 Emergency stops
- Low maintenance
- Allen Bradley PLC controls
- 230, 460 or 575 VAC power supply
- 24 VDC controls
- UL / CSA rated control panel
- Machine mounted guarding
- Overhead pivot pole cord switch

OPTIONS

- Cold Climate Package: heaters for oil tank and control panel
- Automatic pallet height adjustment
- Receiving deck shim kit
- Pallet cart shim cart
- Stainless steel paint for wash down applications
- 3-way handling of outbound loads
- Automatic load placement adjustment: inset, flush, overhang



Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling PTY LTD Working with ease.