

FORKLIFT MOUNTED BIN TIPPER MBT SPECIFICATIONS

During the many years they have been used in industry, our Forward Bin Tippers have tipped millions of tonnes of product and produce. Customers use these tippers to handle a widely diverse range of products efficiently and safely.

FEATURES AND SPECIFICATIONS:

- Fast controlled hydraulic tipping action.
- Quick and easy fitting or removal from forklift.
- Clearview design - does not obstruct vision of tines.
- Minimal loss of forklift load capacity.
- Does not affect forklift capacity to handle pallets or stacked bins.
- 135-degree forward rotation ensures complete emptying of bin.
- Operator does not leave forklift seat.
- Gentle on bins - extends bin life.
- Suitable for a wide range of cubic bin sizes and types - plastic or timber, solid or vented.
- Unique bin grab applies firm grip on bin when inverted.
- Robust construction for years of trouble-free operation.
- Powdercoat finish.
- Minimal maintenance.
- Stainless steel pivot pins.
- Long life, zero maintenance pivot bearings.
- Safety catch prevents tipping if bin is not correctly on tines.
- Patent pending.



Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling *Working with ease*
PTY LTD


FORKLIFT MOUNTED BIN TIPPER MBT SPECIFICATIONS

SPECIFICATIONS:

- Safe working load up to 1000kg.
- Total width across tines - 760mm.
- Fits standard forklift tines up to 1070mm x 45mm x 125mm.
- Standard unit suits bins 1100mm - 1200mm front to rear.
- Lost load (on 1070mm tines) - 300mm.
- Mass - 155kg.
- Horizontal centre of gravity - 600mm.
- Vertical centre of gravity - 90mm.

All specifications horizontal and empty.

Specifications are nominal and subject to change due to our policy of continual development and improvement.

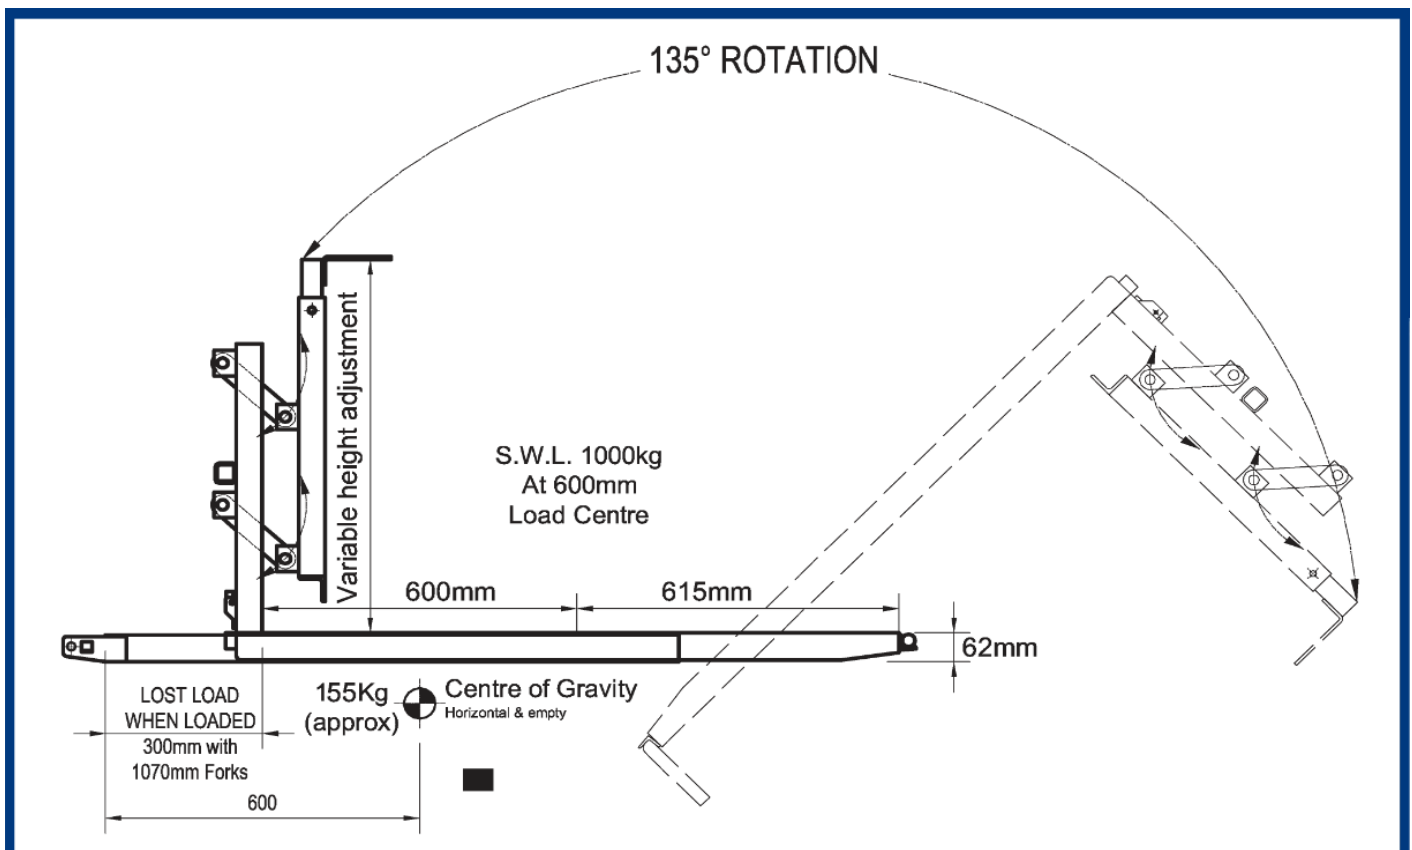

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling *Working with ease*
PTY LTD