

MEZZANINE AND DOCK FORKLIFT GATE




Features

- Ensures safe loading/unloading of elevated areas.
- When one gate is open, the other is closed.
- Excludes pedestrians from unprotected edges.
- Integral kick rail as per AS1657:2013.
- Standard 1.5 metre opening suits most pallets.
- Aluminium rails include hi-vis reflective tape.
- Kit includes all posts, booms and hardware.
- Optional Double U Bar side rails, with fixings available.

Specifications

Description:	Mezzanine Forklift Safety Gate
Material:	Mild steel galvanised, powder coated posts. Powder coated aluminium rails.
Finish:	Powder coated Yellow with reflective.
Rail Type:	Aluminium extrusion 145 x 40mm.
Operation:	Geared & counter-balance assisted lift.
Gate swing:	90-degrees vertically.
Max. open:	1500mm wide x 2000mm deep.
Height:	1000mm.
Clearance:	Above - boom length plus 1 metre.
Mounting:	Surface mounted posts.
Weight:	130kgs gate assembly (approx).

Part No.	Description
MZ1500	Mezzanine forklift gate kit - 1500mm (130kgs)
UBD200SM-G	U-Bar double rail 2000mm (L) x 1040mm (H)

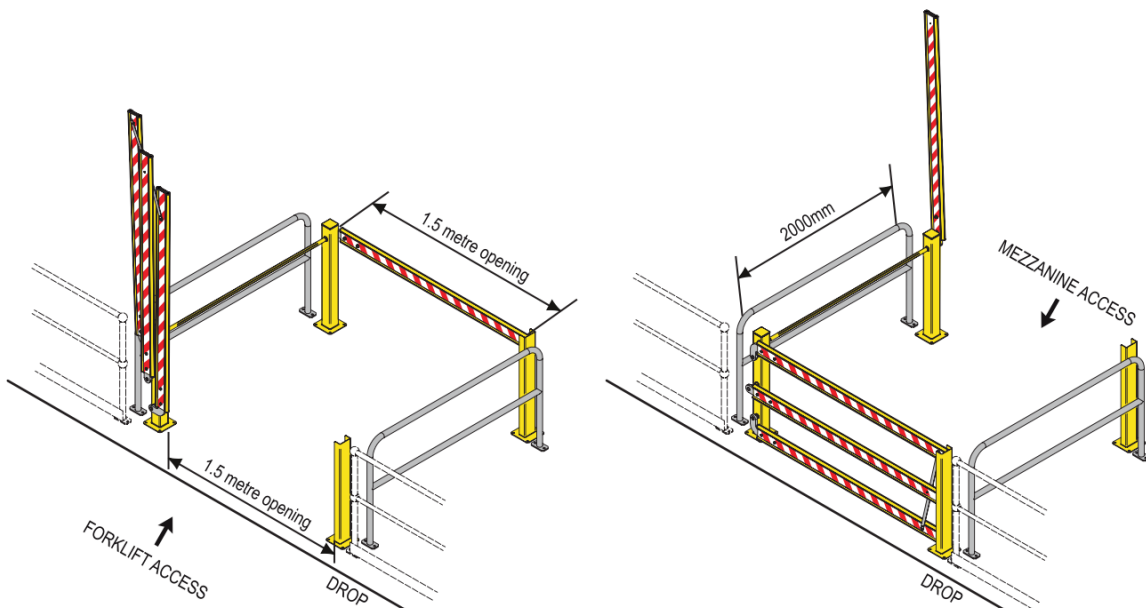

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

MATERIALS
Handling PTY LTD Working with ease.