


# FORKLIFT MOUNTED WORK PLATFORMS

## MFWP25 SPECIFICATIONS

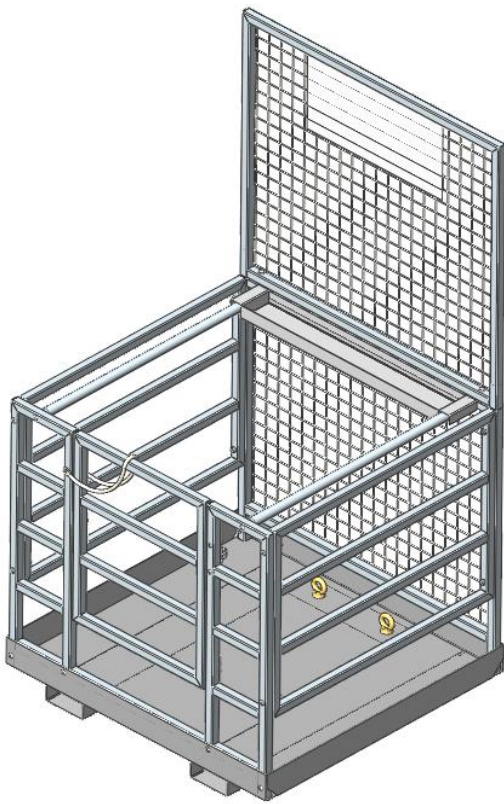

The type MFWP25 Forklift Work Platform has been designed for Forklift transport to safely carry out tasks of "short duration" and "occasional usage" such as maintenance.


Fitted with a self-closing inward opening gate, the unit comes complete with two Floor Mounted Harness Anchor Points certified strictly in accordance with AS/NZS1891.4:2009 and a handy removable Tool Tray.

Manufactured strictly in accordance with Australian Standard AS 2359.1 this safety cage is suitable for up to two people. The unit is supplied standard as a "Flat pack" (1230 x 1150 x 200mm), or may be fully assembled upon request.

\*\* The use of a Work Platform on a Forklift truck should not be considered if the capacity of that Forklift is less than 1800kg for a counterbalanced type or 1080 kg for a Straddle type Forklift. \*\*

### SPECIFICATIONS:

- Working Load Limit (WLL) 250kg
- Load Centre 600mm
- Unit Weight 110kg
- Pocket Size 160 x 60mm
- Pocket Centres 640mm
- Horizontal C of G 510mm
- Vertical C of G 600mm
- Supplied with Slipper Locking Pins
- Zinc Plated Finish

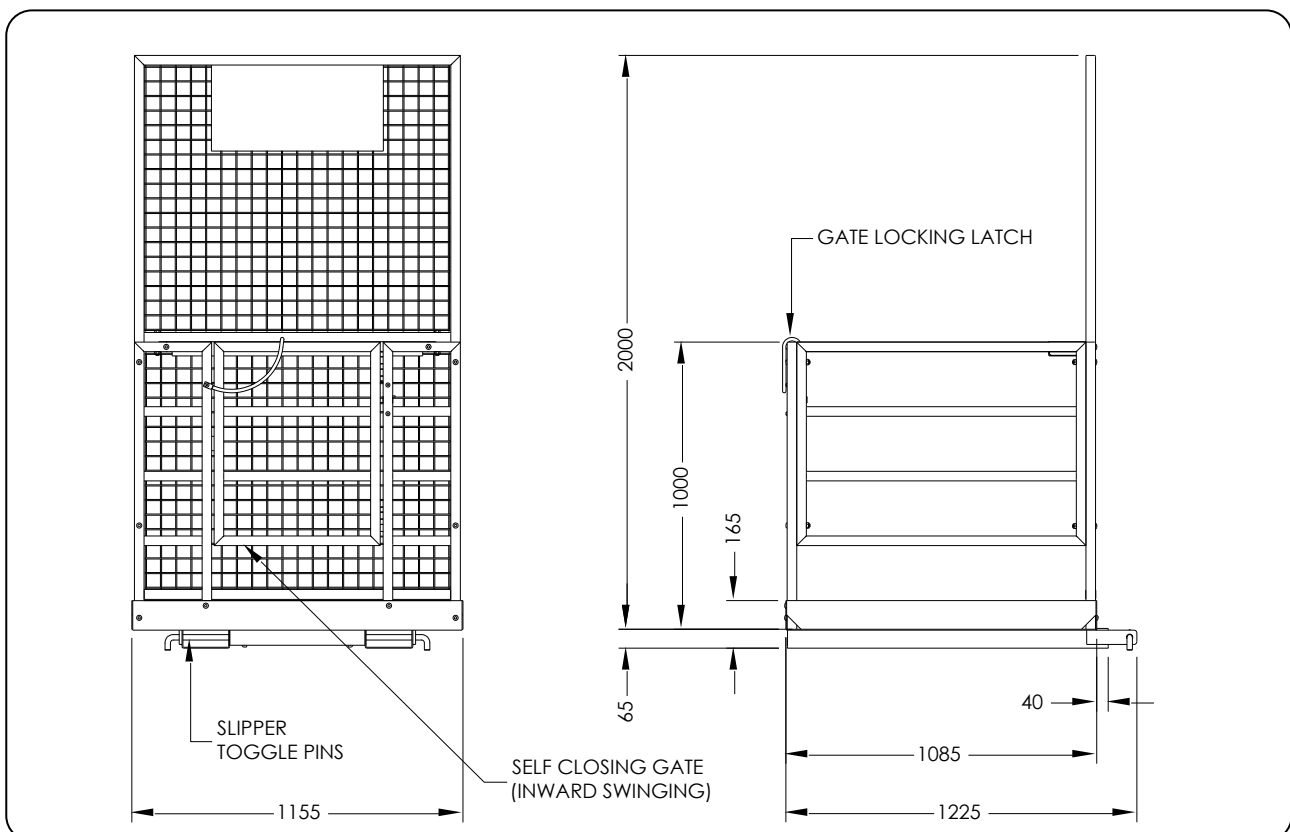

Australia Wide Sales & Service

sales@materialshandling.com.au | www.materialshandling.com.au | 1300 25 84 07

**MATERIALS**  
**Handling** PTY LTD *Working with ease.*